



Model: GS1028PS2

24-Port Gigabit PoE+ Switch with 2 GbE and 2 Combo Ports

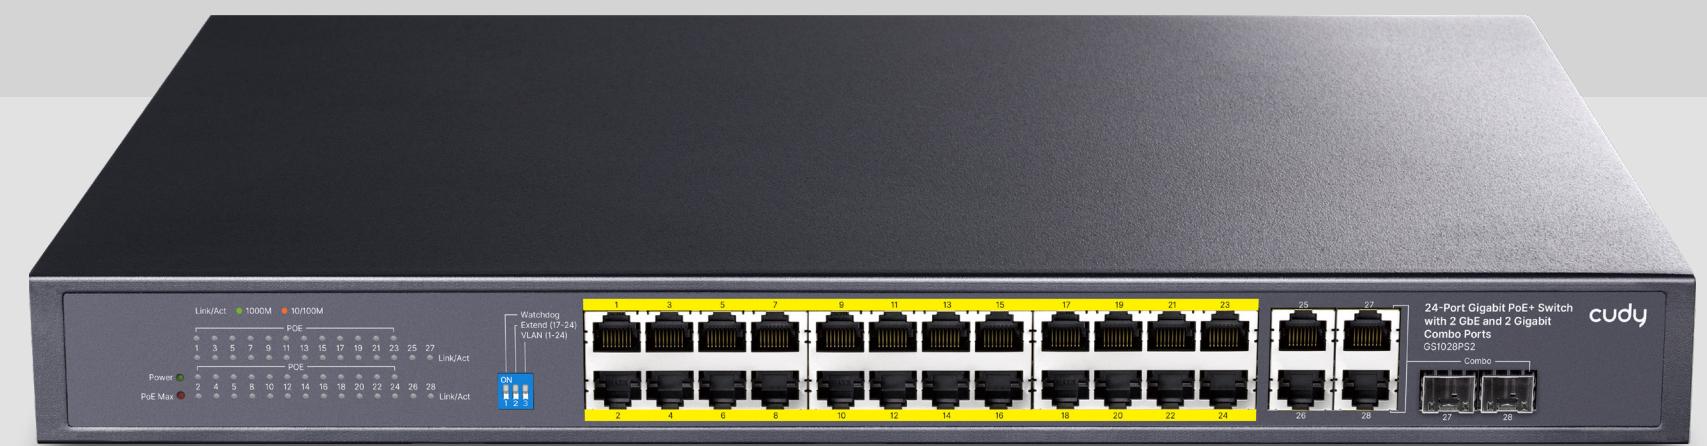


24 PoE+ Ports	300W Power Supply	 Watchdog
-------------------------	-----------------------------	--

Datasheet

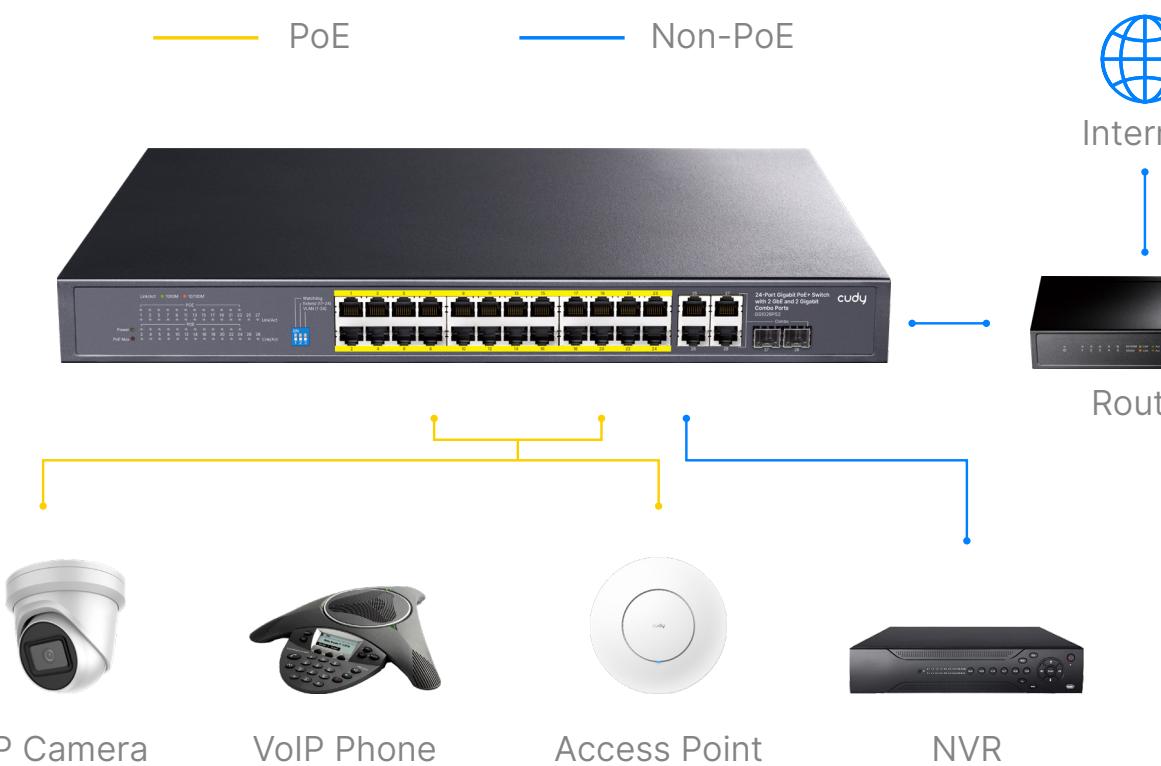

↗ Extend for Long-Range Powering

Prolongs the PoE transmission distance of ports 17~24 to a maximum of 250 m, enabling long-range surveillance installations.

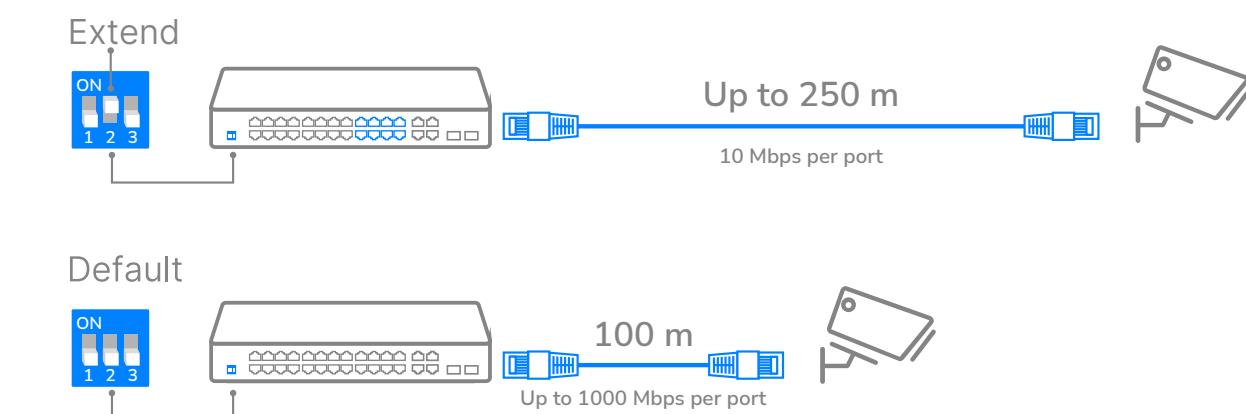


💡 PoE Status

Check the PoE powering status of each PoE port and improve efficiency of troubleshooting.


🐱 Watchdog for Improved Reliability

The PoE Watchdog monitors link activity on port 1~24 and attempts to reboot connected clients that have been inactive for 5 minutes, ensuring system stability. Do not turn it on for clients with online auto-upgrade feature.

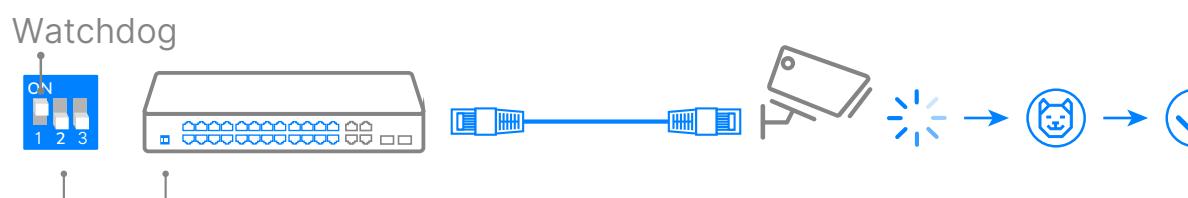

⬇ VLAN Mode for Port Isolation

Separates clients into different subnets for improved security, preventing data leakage in case of client-side hacking.

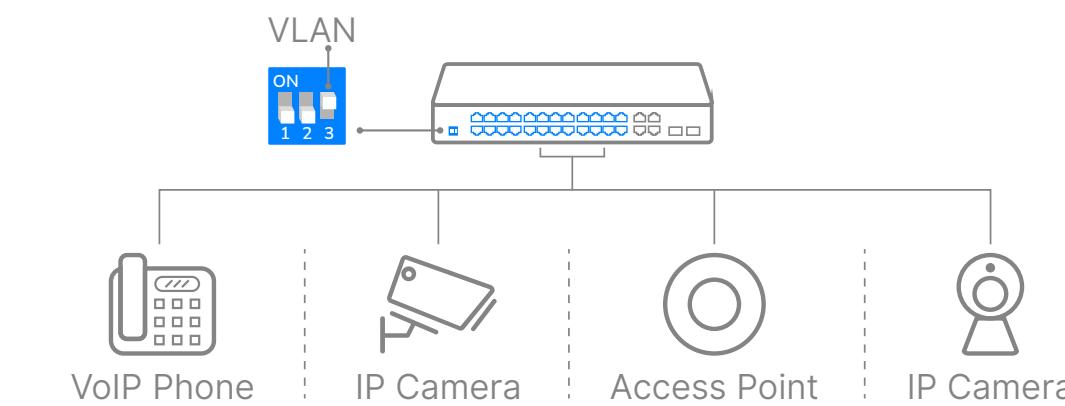

Highlights

A rack-mounted PoE switch with a 300W power supply, featuring 24 PoE GbE, 2 uplink GbE, and 2 uplink GbE/SFP combo ports.

- 24× GbE with 802.3at/af PoE
- 2× Uplink GbE + 2× Uplink Combo
- 300W Power Supply
- Extend On/Off, VLAN On/Off
- Watchdog On/Off
- PoE Max, PoE per Port LED
- Smart Fan Cooling
- Desktop, Rack-Mount
- 440×220×44 mm (17.32×8.66×1.73")

Package Content

- GS1028PS2
- Power Cord
- Mounting Kit
- Installation Guide

Specifications

Interfaces	Gigabit SFP/RJ45 Combo Ports	2
	Gigabit RJ45 Ports	26
	Gigabit RJ45 PoE Ports	#1~#24
	Max Power on a Single PoE Port	30W
PoE Port Notes	The PoE ports comply with IEEE 802.3at/af standards.	
Intelligent Power	Automatically disconnect the lastly powered device when exceeds budget.	
Management (PoE)		
Extend Mode Ports	#17~#24	
VLAN Mode Ports	#1~#24	
LED	Power PoE Status of Each PoE Port Link/ACT of Each Ethernet Port PoE Max Status	
Power Input	AC Inlet	
Physical Buttons	Extend On/Off VLAN On/Off PoE Watchdog On/Off	
Physical Buttons Note	The PoE Watchdog will attempt to reboot the plugged-in clients that have been inactive for 5 min. Do not turn it on for clients with online auto-upgrade feature.	

Specifications

Performance	Copper Speed and Distance	Cat. 3 or higher cable: 100 meters at 10 Mbps Cat. 5 or higher cable: 100 meters at 100 Mbps Cat. 5e or higher cable: 100 meters at Gigabit Cat. 5e or higher cable: 250 meters at 10 Mbps
	Copper Speed and Distance Note	250-meter transmission is only available on the Extend Mode ports when the Extend Mode is activated.
	Optical Spec and Distance	Depends on the Installed Optical Module
	MAC Address Table	8192
	Max Switching Capacity	56 Gbps
	Max Forwarding Rate	41.664 Mpps
	Jumbo Frame	15 KB
	Packet Buffer	4 Mbit
Power	Power Methods	AC
	AC	100-240V 50/60Hz
	Power Supply	300W
	Max Power Excluding PoE	20W
Switching	L2 Features (always-on, not-configurable)	Loop Prevention Loop Detection DSCP QoS 802.1p QoS

Switching	802.3 Protocols	802.3i 10BASE-T 802.3u 100BASE-TX 802.3ab 1000BASE-T 802.3z 1000BASE-X 802.3x Flow Control 802.3af PoE 802.3at PoE
	Reliability	Smart Cooling Fan Grounding Methods EMS
	Smart Cooling Fan	1 (Speed adjusts based on power consumption)
	Grounding Methods	Three-Prong Plug
	EMS	IEC/EN 61000-4-2, Level 3 ESD: Contact: 6kV; Air: 8kV IEC/EN 61000-4-5, Level 4 Surge: Power: DM 2kV, CM 4kV; RJ45: CM 4kV
	Environment	Operating Temperature: 0~40 °C (32~104 °F) Storage Temperature: -40~70°C (-40~158 °F) Operating Humidity: 10~90% non-condensing Storage Humidity: 10~95% non-condensing
	Mechanical	Dimension Product Weight Casing Material Installation
	Dimension	440×220×44 mm (17.32×8.66×1.73")
	Product Weight	TBD
	Casing Material	Metal
	Installation	Desktop, Rackmount via Brackets